


O'RING 2

The O'Ring 2 sling combines the high performance of Katuali ropes and the versatility of Friction Rings, making it lightweight and practical during various felling situations.



SLING

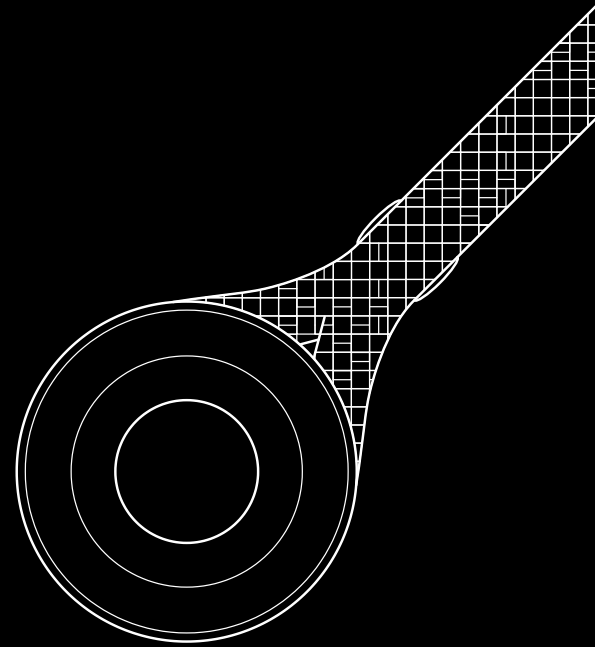

DESCRIPTION

There is a whole range of O'RING 2 slings, they can be used either as main anchor or as redirection. The O'RING in 16 and 18 mm are perfect as main anchors, while the O'RING in 12 and 14 mm will be mostly used for redirections.

They are very light, flexible and their short length helps the climber with an easy and fast set up.

TECHNICAL INFORMATION

Standard	Machinery Directive 2006/42/EC				
Material	Sling: 100% polyester, polyurethane-coating (pre-stretched) Ring: aluminum				
Construction	24-strand double braid				
Cover / core percentage	50% / 50%				
	Weight	Length	Maximal rope diameter	MBS	WLL
Katuali 12 Ø	450 g (1 lb)	3 m (9.8 ft)	14 mm	39 kN	5.5 kN
Katuali 14 Ø	800 g (1.8 lb)	4 m (13.1 ft)	20 mm	55 kN	7.8 kN
Katuali 16 Ø	1 500 g (3.3 lb)	5 m (16.4 ft)	28 mm	69 kN	9.8 kN
Katuali 18 Ø	2 050 g (4.5 lb)	6 m (19.7 ft)	28 mm	79 kN	11.2 kN

REFERENCES

FTC/OR2-3 length (m/ft) - 3 m (9.8 ft)

FTC/OR2-4 length (m/ft) - 4 m (13.1 ft)

FTC/OR2-5 length (m/ft) - 5 m (16.4 ft)

FTC/OR2-6 length (m/ft) - 6 m (19.6 ft)

DOCUMENT

Declaration of conformity

Instructions

